

MFG. MM-1332 / 1331 / 1333

IWP-X-20-XX

14

FITTING	RES	PROBE LENGTH
2 = 1/8"	IN K	02 = 2"
4 = 1/4"	DHM	03 = 3"
6 = 3/8"		06 = 6"
8 = 1/2"		09 = 9"
		12 = 12"

INTERNAL WET PROBE



MFG. MM-1334 / 1331 / 1333

IW9-X-20-XX

15

FITTING	RES	PROBE LENGTH
4 = 1/4"	IN K	02 = 2"
6 = 3/8"	DHM	03 = 3"
8 = 1/2"		04 = 4"
		06 = 6"
		09 = 9"
		12 = 12"

INTERNAL WET PROBE
90 DEGR PORT

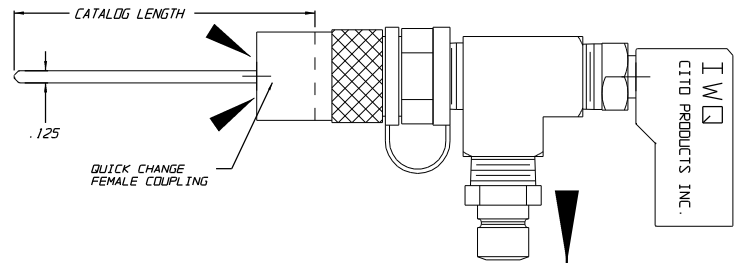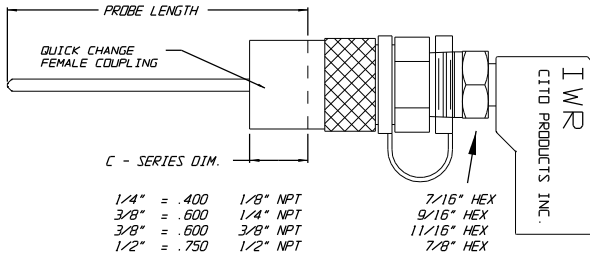

MFG. MM-1336 / MM-1331 / 1333

IWR-X-20-XX

16

FITTING	RES	PROBE LENGTH
4 = 1/4"	IN K	02 = 2"
6 = 3/8"	DHM	03 = 3"
8 = 1/2"		04 = 4"
		06 = 6"
		09 = 9"
		12 = 12"

INTERNAL WET REMOVABLE


MFG. MM-1338 / 1331- MM-1339-LOCK
SEE CUSTOM SENSORS

IWQ-X-20-XX

17

FITTING	RES	PROBE LENGTH
4 = 1/4"	IN K	02 = 2"
6 = 3/8"	DHM	03 = 3"
8 = 1/2"		04 = 4"
		06 = 6"
		09 = 9"
		12 = 12"

INTERNAL WET QUICK CHANGE

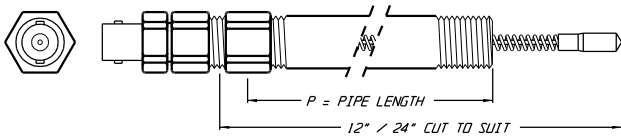

SPP-3-PX-20-XX

9

SPRING PIPE PROBE	SENSOR DIA.	RESISTANCE	SENSOR LENGTH
3 = 3/16"	3 = 3/16"	IN K DHM @77 DEGR.F	IN INCHES
1/4" NPT PIPE			12 = 12"
P4 = 4"			24 = 24"
P6 = 6"			
P8 = 8"			
P10 = 10"			
P12 = 12"			



MATERIAL :

FRAME SIZE 20" X 15"
2 X SCALE (SF .5)
H. WIEDER 3 MAY 2022

FINISH:

TOLERANCE
.00 + - .01"
.000 + - .005"
.0000 + - .0001"

WET PROBES
DWG. NO. IWP-1800